

GABIONS GALVANIZED & PVC COATED

Gabions are baskets made of Mesh 8 double twisted steel woven wire mesh, as per ASTM A975-97 (Figs. 1, 2). Gabions are filled with stones at the project site to form flexible, permeable, monolithic structures such as retaining walls, channel linings, and weirs for erosion control projects.

The steel wire used in the manufacture of the gabion is heavily zinc coated soft temper steel. A PVC coating is then applied to provide added protection for use in polluted environments where soils or water are acidic: in salt or fresh water, or wherever the risk of corrosion is present. The PVC coating has a nominal thickness of 0.50 mm. The standard specifications of mesh-wire are shown in Table 2.

The gabion is divided into cells by means of diaphragms positioned at approximately 1m centers (Fig.1). In order to reinforce the structure, all mesh panel edges are selvaged with a wire having a greater diameter (Table 3). Dimensions and sizes of PVC coated gabions are shown in Table 1.

The material is supplied from an ISO 9001 certified factory.

Wire

All tests on wire must be performed prior to manufacturing the mesh.

- 1. Tensile strength:** the wire used for the manufacture of gabions shall have a tensile strength between 350-500 MPa according to EN 10223-3. Wire tolerances (Table 3) are in accordance with EN10223-3.
- 2. Elongation:** Elongation shall not be less than 10%, in accordance with EN10223-3.
- 3. Zinc coating:** minimum quantities of zinc shown at Table 3 meet the requirements of EN10244-2 Class A.
- 4. Adhesion of zinc:** the adhesion of the zinc coating to the wire shall be such that, when the wire is wrapped six turns around a mandrel having four times the diameter of the wire, it does not flake or crack when rubbing it with the bare fingers, in accordance with ASTM A641-97.

P.V.C. (Polyvinyl Chloride) Coating

The technical characteristics and the resistance of the PVC to ageing meet the relevant standards. The main values for the PVC material are as follows:

Specific gravity: 1.30-1.35 kg/dm³ in accordance with ASTM D792 Table 1;

Hardness: between 50 and 60 Shore D, according to ASTM D 2240 -91;

Tensile strength: not less than 20.6 MPa, according to ASTM D412-92;

Modulus of elasticity: not less than 18.6 MPa, in accordance with ASTM D412-92;

Abrasion resistance: the percentage of the weight loss shall be less than 12%, according to ASTM D1242-92.

Creeping corrosion: max. penetration of corrosion of the wire from a square cut end shall be 1 in. (25 mm) when the specimen has been immersed for 2,000 hours in a 5% solution HCl (hydrochloric acid 12 Be).

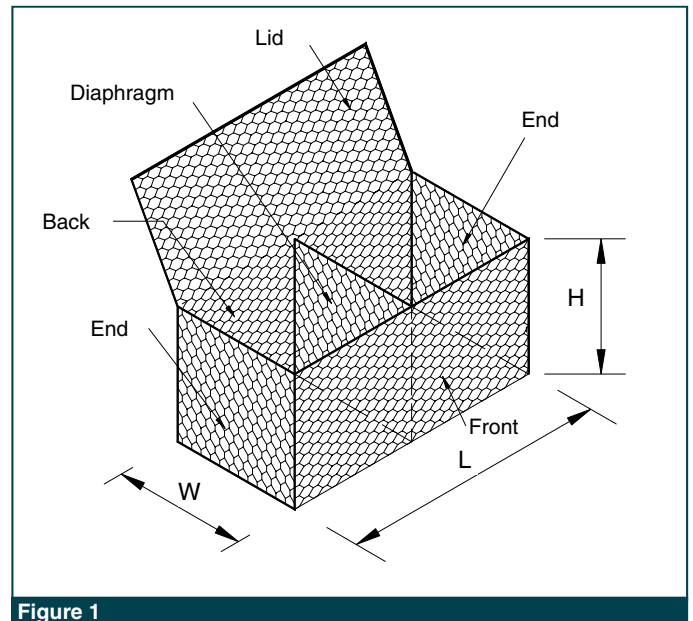


Figure 1

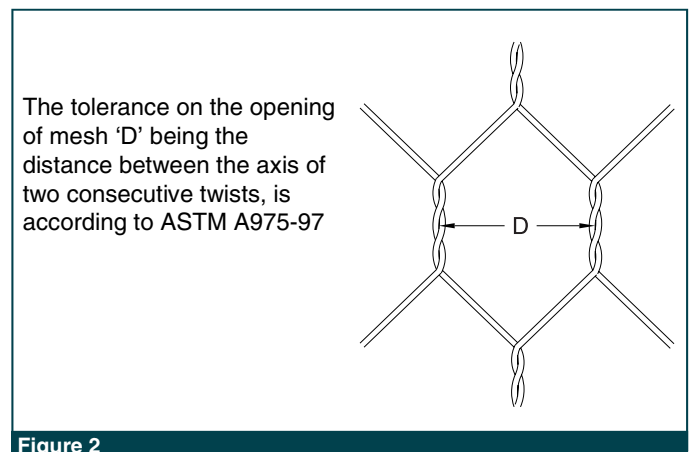


Figure 2

The accelerated ageing tests are:

Salt spray test: test period 3,000 hours, test method ASTM B117-94;

Exposure to UV rays: test period 3,000 hours at 145° F (63°C), test method ASTM D1499-92a and ASTM G23-93 apparatus Type E;

Brittleness temperature: no higher than 15°F (- 9°C), or lower temperature when specified by the purchaser, when tested in accordance with ASTM D746.

The properties after ageing tests shall be as follows:

Appearance of coated mesh: no cracking, stripping or air bubbles, and no appreciable variation in color;

Specific Gravity: variations shall not exceed 6%;

Hardness: variations shall not exceed 10%;

Tensile strength: variations shall not exceed 25%;

Modulus of elasticity: variations shall not exceed 25%;

Abrasion resistance: variations shall not exceed 10%;

Brittleness temperature: shall not exceed + 64°F (+18°C).

1. Table of sizes for gabions

L=Length (m)	W=Width (m)	H=Height (m)	# of cells
2	1	0.5	2
3	1	0.5	3
4	1	0.5	4
1.5	1	1	1
2	1	1	2
3	1	1	3
4	1	1	4

All sizes and dimensions are nominal.
Tolerances of $\pm 5\%$ of the width, height, and length of the gabions shall be permitted.

2. Standard Mesh-Wire

Type	D (mm)	Tolerance	Internal Wire Dia (mm)	External Wire Dia (mm)
Mesh8 ZN+PVC	82	$\pm 10\%$	2.70	3.70

3. Standard wire diameters

	Lacing Wire	Mesh Wire	Selvedge Wire
PVC Mesh Diameter	\varnothing mm	2.2/3.2	2.7/3.7
Wire Tolerance	(\pm) \varnothing mm	0.06	0.06
Minimum Quantity of Zinc	gr/m ²	230	245

Lacing Operations

Lacing operations can be made by using the tools shown in Fig.5. Stainless steel rings having the following specification can be used instead of lacing wire (Fig.4):

Stainless steel rings for PVC coated products

- diameter: 3.05 mm, ASTM A313, Type 302, Class I
- tensile strength: 1530-1745 MPa, ASTM A313-92.

Spacing of the rings must not exceed 200 mm (Fig.3)

Quantity Request

When requesting a quote, please specify:

- size of units (length x width x height, see Fig.1),
- type of mesh,
- type of coating

EXAMPLE: No. 100 gabions 2x1x1m - Mesh type 8 - Wire diam. 2.7/3.7 mm - Galvanized + PVC coated

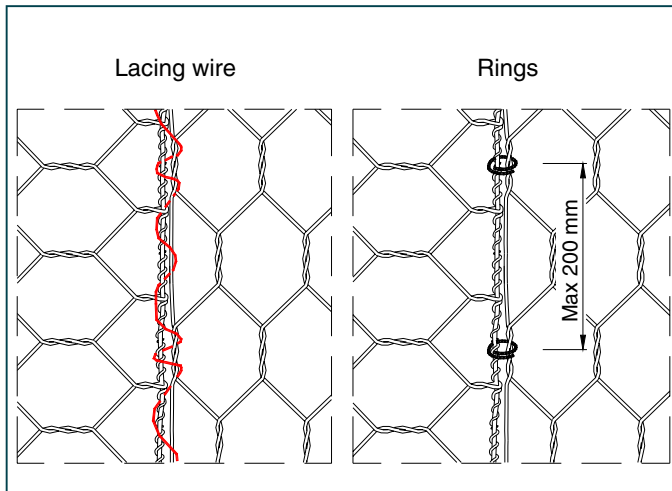


Figure 3



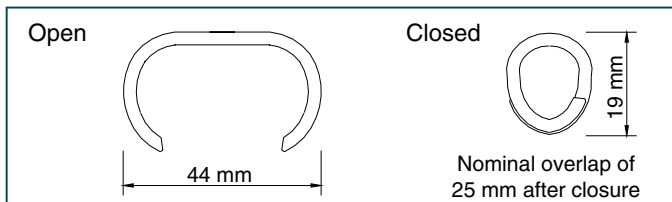


Figure 4

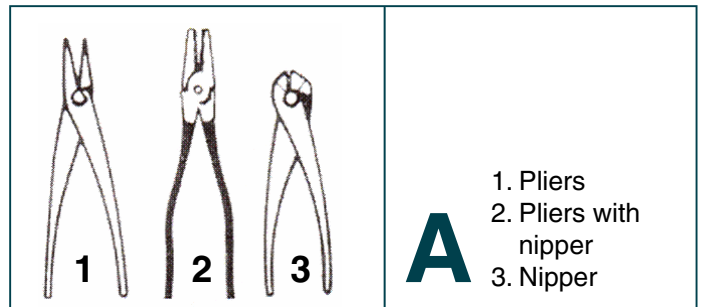


A

1. Pliers
2. Pliers with nipper
3. Nipper

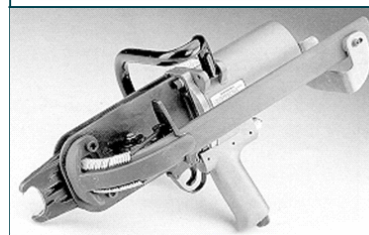

B

Pneumatic Spenax tool

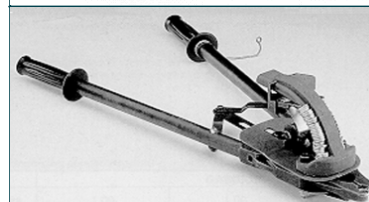

C

Manual tool